



7F-0019

TSUBAKI “V” Class Oil Field Chain




Catalog No.1130

TSUBAKI "V" Class Roller Chain for Oil Well Machinery




TSUBAKI "V" class roller chain is designed for use in Rig Drives for oil wells where chain must stand up to the most severe conditions. Built to withstand extra-heavy shock load and high velocity, TSUBAKI "V" class roller chain is more than capable of meeting your requirements. TSUBAKI "V" class roller chain is API approved and is interchangeable with ANSI chain (American National Standards Institute).

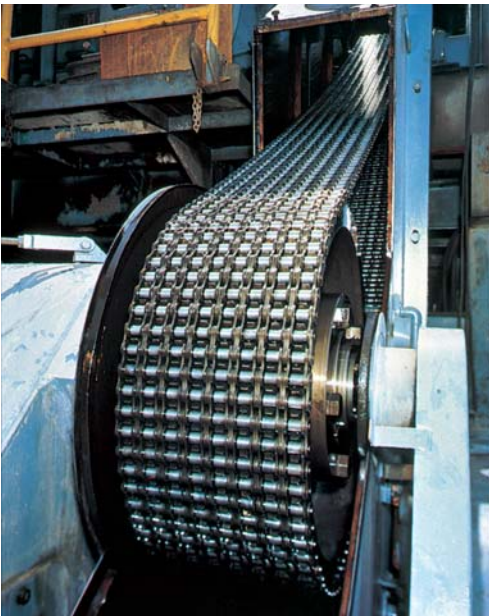

Pump Drive

CHAIN DIAGRAM OF DRAWWORKS, COMPOUND AND PUMP

[Chain Pitch in Inch (mm) and Strand]

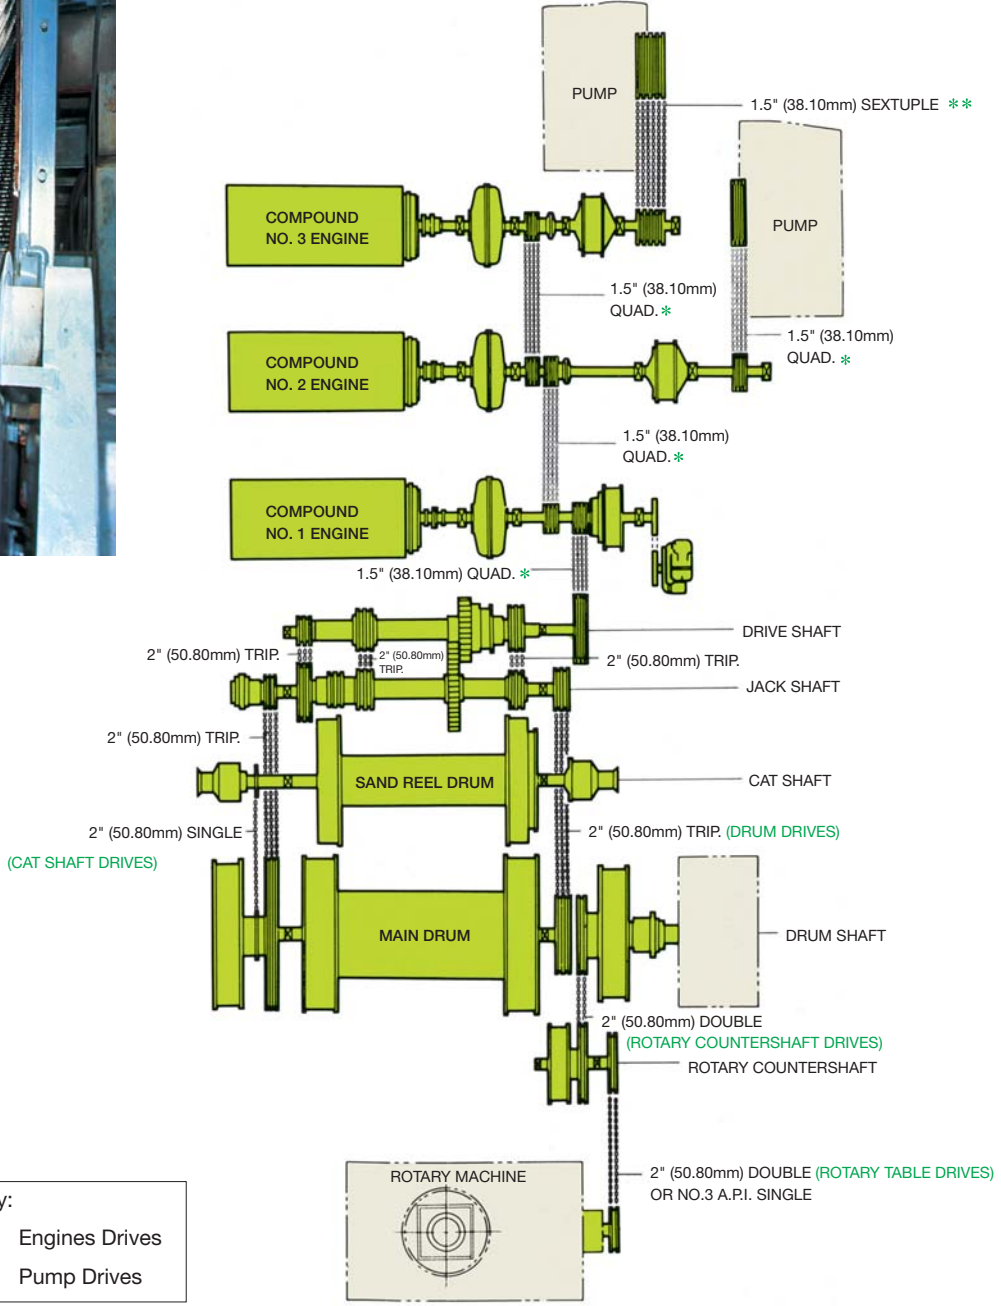

Key:
 * Engines Drives
 ** Pump Drives



Longer Life and Less Down Time Through Advanced Technology and Design

Double Strand Chain



JQA-0911
Chain Division



JQA-EM3392
Kyotanabe Plant

Our Kyotanabe Plant in Japan is the most advanced chain manufacturing facility in the world and has been accredited with both ISO 9001 and ISO 14001 certifications.

Triple Strand Chain

Sextuple Strand Chain


Ball-Drifting



Greater Fatigue Resistance


Pin holes in link plates are ball drifted after heat-treatment for greater fatigue resistance. A 30% increase in chain life compared with ANSI standard chains is the net result of this procedure.

Shot-Peening

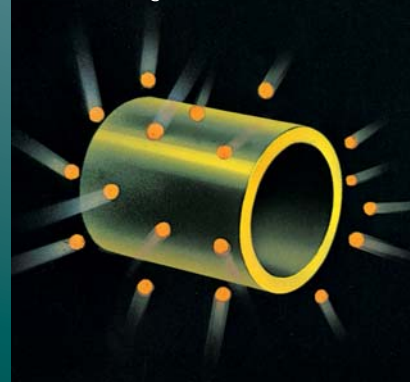

High Speed Durability

Rollers, precisely manufactured, are shot-peened after heat-treatment to give them superior fatigue life and high speed durability.

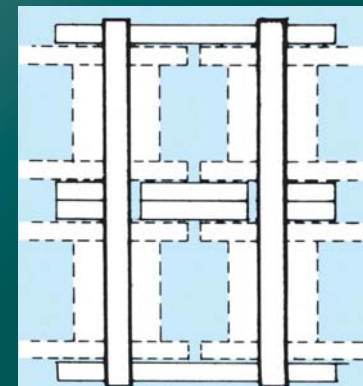

Middle link plates have a shorter pitch than the pin link plates creating a contact fit. This allows for easier cutting and assembly of the chain without sacrificing its horsepower rating.


Dimensions of Single and Multiple Strand Chains



TSUBAKI "V" Class Roller Chains are made in six standard pitches 1.25 "(31.75mm) to 3" (76.20mm) in single strand and multiple strand for any power transmission requirement.

Dimensions:inch (metric unit)

TSUBAKI		No. of Strands	Pitch	Roller Diam.	Link Plate				Pin Diam.	Pin Length	Transverse Pitch	Average Tensile Strength	Approx. Weight
Chain	No.				P	R	W	T					
RS100V	1								1.678 (42.6)	—	26,400 (118)	2.68 (3.99)	
	2								3.090 (78.5)		52,800 (235)	5.27 (7.85)	
	3								4.504 (114.4)		79,200 (353)	7.91 (11.77)	
	4	1.25	.750	.750	.156	1.185	1.024	.375	5.914 (150.2)	1.408	105,600 (471)	10.55 (15.70)	
	5	(31.75)	(19.05)	(19.05)	(4.0)	(30.1)	(26.0)	(9.54)	7.326 (186.1)	(35.8)	132,000 (588)	13.12 (19.53)	
	6								8.740 (222.0)		158,400 (706)	15.78 (23.48)	
	7								10.150 (257.8)		184,800 (824)	18.43 (27.42)	
	8								11.563 (293.7)		211,200 (941)	21.06 (31.34)	
RS120V	1								2.118 (53.8)	—	37,400 (167)	3.98 (5.93)	
	2								3.905 (99.2)		74,800 (333)	7.86 (11.70)	
	3								5.701 (144.8)		112,200 (500)	11.78 (17.53)	
	4	1.5	.875	1.0	.187	1.425	1.228	.437	7.488 (190.2)	1.789	149,600 (667)	15.70 (23.36)	
	5	(38.10)	(22.23)	(25.40)	(4.8)	(36.2)	(31.2)	(11.11)	9.280 (235.7)	(45.4)	187,000 (834)	19.59 (29.16)	
	6								11.067 (281.1)		224,400 (1,000)	23.49 (34.96)	
	7								12.858 (326.6)		261,800 (1,170)	26.54 (39.49)	
	8								14.646 (372.0)		299,200 (1,330)	30.32 (45.12)	
RS140V	1								2.307 (58.6)	—	48,400 (216)	5.03 (7.49)	
	2								4.233 (107.5)		96,800 (431)	9.97 (14.83)	
	3								6.165 (156.6)		145,200 (647)	14.92 (22.20)	
	4	1.75	1.000	1.0	.219	1.661	1.433	.500	8.091 (205.5)	1.924	193,600 (863)	19.16 (28.52)	
	5	(44.45)	(25.40)	(25.40)	(5.6)	(42.2)	(36.4)	(12.71)	10.015 (254.4)	(48.9)	242,000 (1,080)	24.84 (36.97)	
	6								11.949 (303.5)		290,400 (1,290)	29.77 (44.30)	
	7								13.874 (352.4)		338,800 (1,510)	35.04 (52.14)	
	8								15.799 (401.3)		387,200 (1,730)	40.04 (59.58)	
RS160V	1								2.705 (68.7)	—	60,600 (270)	6.79 (10.10)	
	2								5.011 (127.3)		119,000 (530)	13.47 (20.04)	
	3								7.319 (185.9)		178,500 (794)	20.17 (30.02)	
	4	2.0	1.125	1.25	.250	1.898	1.638	.562	9.622 (244.4)	2.305	238,000 (1,060)	26.92 (40.06)	
	5	(50.80)	(28.58)	(31.75)	(6.4)	(48.2)	(41.6)	(14.29)	11.929 (303.0)	(58.5)	297,500 (1,320)	33.52 (49.89)	
	6								14.237 (361.6)		357,000 (1,590)	40.27 (59.93)	
	7								16.543 (420.2)		416,000 (1,850)	46.58 (69.31)	
	8								18.850 (478.8)		475,000 (2,120)	53.22 (79.19)	
RS200V	1								3.299 (83.8)	—	103,600 (461)	11.04 (16.49)	
	2								6.122 (155.5)		207,200 (922)	21.93 (32.63)	
	3								8.945 (227.2)		310,800 (1,380)	32.94 (49.02)	
	4	2.5	1.562	1.5	.312	2.374	2.047	.781	11.768 (298.9)	2.817	414,400 (1,840)	43.79 (65.16)	
	5	(63.50)	(39.68)	(38.10)	(8.0)	(60.3)	(52.0)	(19.85)	14.590 (370.6)	(71.6)	518,000 (2,300)	54.64 (81.32)	
	6								17.414 (442.3)		621,600 (2,770)	58.65 (97.59)	
	7								20.232 (513.9)		724,000 (3,230)	76.47 (113.79)	
	8								23.051 (585.5)		827,000 (3,690)	87.37 (130.01)	
RS240V	1								4.071 (103.4)	—	152,100 (677)	16.46 (24.50)	
	2								7.531 (191.3)		304,200 (1,350)	32.32 (48.10)	
	3	3.0	1.875	1.875	.375	2.850	2.457	.937	10.984 (279.0)	3.458	456,300 (2,030)	48.11 (71.60)	
	4	(76.20)	(47.63)	(47.63)	(9.5)	(72.4)	(62.4)	(23.81)	14.453 (367.1)	(87.8)	608,400 (2,710)	63.90 (95.10)	
	5								17.913 (455.0)		760,500 (3,380)	79.70 (118.60)	
	6								21.370 (542.8)		912,600 (4,060)	95.49 (142.10)	

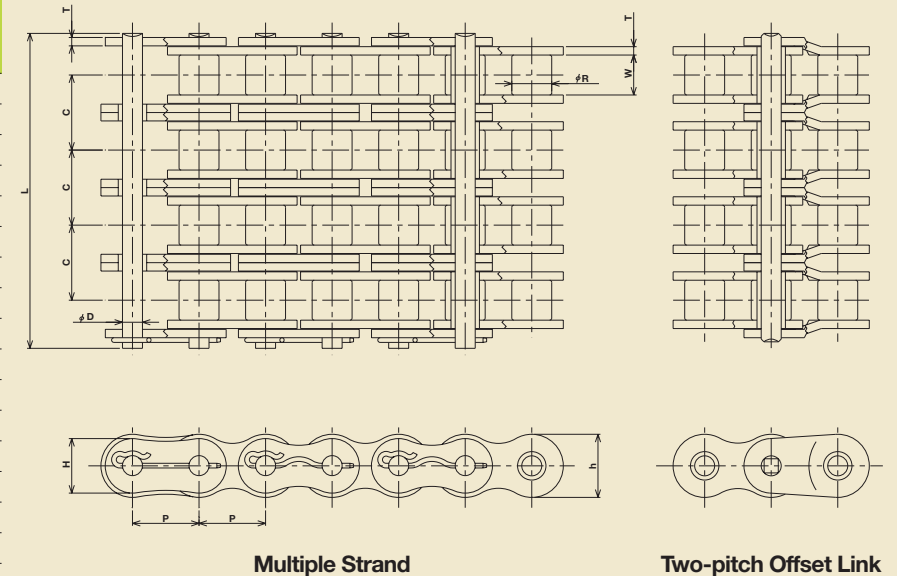

Note:
Shepherd crook type cotter () will be supplied unless otherwise specified.

Connecting Links and Two-pitch Offset Link



Shepherd crook and cotter pin type connecting links with pin link plates press-fitted.

BCL (bushed) type connecting link is employed for multiple strand chain.
The cover plate is designed for a snug press-fit on the pins for use on drives that are subjected to high speeds and heavy shock loads.
Removal of the press-fitted pin may be less convenient than that of ordinary connecting links, but better fatigue resistance is provided.



Two-pitch Offset Link
The pin is press-fitted onto the offset linkplates. It is recommended that offset links should be used only when a chain length of an odd number of links cannot be avoided.
Four-pitch type offset link is also available.

Note : Cotter type chain (shepherd's crook type cotter) will be supplied for all chains unless otherwise specified. Riveted type chain will be supplied upon request.



TSUBAKIMOTO CHAIN CO.

Headquarters

Fukokuseimei Building 7F
2-4, Komatsubara-cho
Kita-Ku, Osaka 530-0018, Japan
Phone : 06-6313-3131
Facsimile : 06-6313-6657
Internet:
<http://tsubakimoto.com>

Chain Division

Chain Sales Department
1-3, Kannabidai 1-chome
Kyotanabe, Kyoto 610-0380, Japan
Phone : 0774-64-5023/4
Facsimile : 0774-64-5212

For further information please
contact the Chain Division.



Kyotanabe Plant

Affiliated Companies:

U.S. TSUBAKI, INC.
301 E. Marquardt Drive
Wheeling, IL 60090
U.S.A.
Phone : 847-459-9500
Facsimile : 847-459-9515

TSUBAKI AUSTRALIA PTY. LTD.
Unit E. 95-101 Silverwater Road
Silverwater, N.S.W. 2128
Australia
Phone : 02-9648-5269
Facsimile : 02-9648-3115

**TSUBAKIMOTO CHAIN TRADING
(SHANGHAI) CO., LTD.**
Room 1712, Lippo Plaza,
No. 222 Huai Hai Zhong Rd.
Shanghai China 200021
Phone : 021-5396-6651/2
Facsimile : 021-5396-6628

TSUBAKIMOTO EUROPE B. V.
Belder 1, 4704 RK Roosendaal
The Netherlands
Phone : 0165-594800
Facsimile : 0165-549450

TAIWAN TSUBAKIMOTO CO.
No. 7 Feng Sun Keng
Kuei Shan-Hsiang, Taoyuan-Hsien
Taiwan R.O.C.
Phone : 033-293827/8/9
Facsimile : 033-293065

KOREA CONVEYOR IND. CO., LTD.
72-1, Onsoo-Dong
Kuro-Ku, Seoul,
Korea
Phone : 82-2-2619-4711
Facsimile : 82-2-2619-0819

TSUBAKI of CANADA LIMITED
1630 Drew Road
Mississauga, Ontario, L5S 1J6
Canada
Phone : 905-676-0400
Facsimile : 905-676-0904

TSUBAKIMOTO U.K. LTD.
Osier Drive, Sherwood Park
Annesley,
Nottingham NG15 0DX U.K.
Phone : 01623-688-700
Facsimile : 01623-688-789

TSUBAKIMOTO SINGAPORE PTE. LTD.
25 Gul Lane
Jurong
Singapore 629419
Phone : 68610422/3/4
Facsimile : 68617035

TSUBAKIMOTO (THAILAND) CO., LTD.
Room No. C.T.W.Y Office Center,
10th Floor, Serm-Mit Tower,
159 Soi Asoke, Sukhumvit Road,
North-Klongtoey, Wattana, Bangkok 10110
Thailand
Phone : 66-2-261-9991/2
Facsimile : 66-2-261-9993

Distributed by: